

The best technology
to make your life more
comfortable on board








Stamoid

Smart 1

7-year warranty


UPF 50+

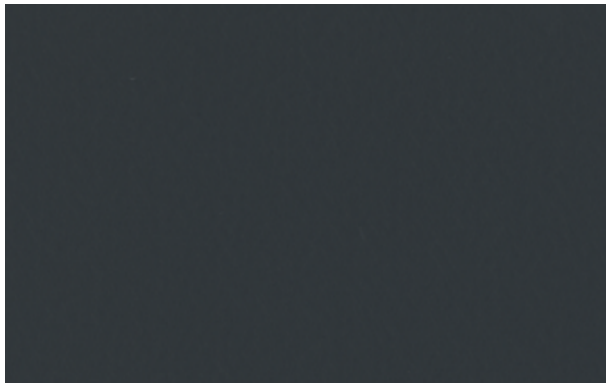

Anthracite

250 cm

F4160-20166



White
250 cm
F4160-03244




Beige
250 cm
F4160-01897




Pearl grey
250 cm
F4160-10001


The best of technology to make your life on board easier

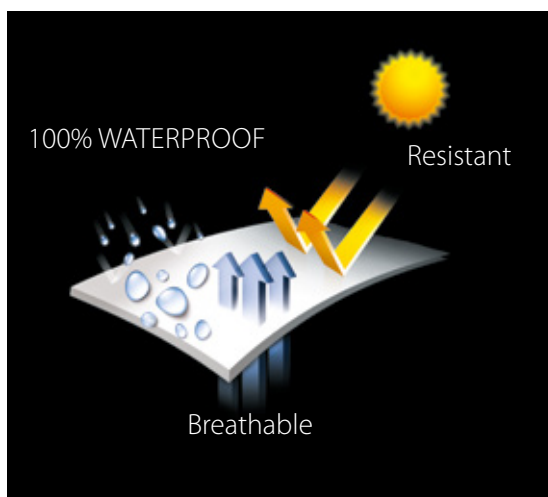

LIGHTWEIGHT
20% lighter
than standard protection



COMPACT
+60% more space available
than with standard protection



Quick and easy upkeep



Handling comfort thanks
to lightness of the fabrics





Optimized storage, more compact, their low
volume requirement is a real asset

Stamoid


Light

5-year warranty


UPF 50+

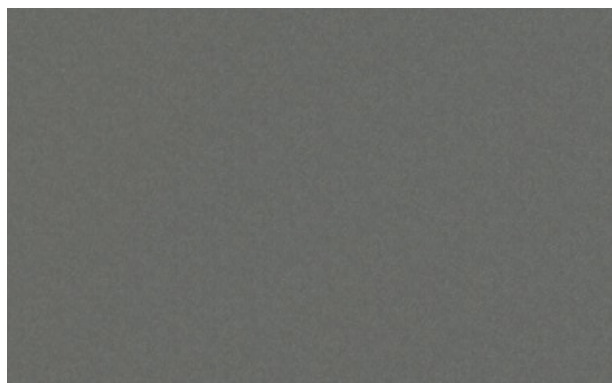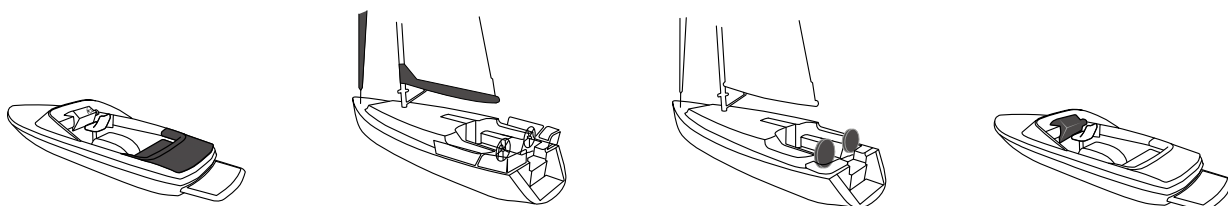


Cloud grey 150-260 cm F4128-320218




Snow White
150-260-300cm
F4128-310309




White
150-260-300 cm
F4128-303244




Cream
150-260 cm
F4128-310204




Ivory
150-260 cm
F4128-310081




Beige
150-260-300 cm
F4128-301897



Desert
150-260 cm
F4128-320217




Taupe
150-260 cm
F4128-320165




Pearl grey
150-260-300 cm
F4128-310001




Silver
150-260 cm
F4128-10124



Anthracite
150-260 cm
F4128-320166



Navy
150-260 cm
F4128-310235



Black
150-260 cm
F4128-300002



Royal Blue
150-260 cm
F4128-304997



Total protection against UVB rays and highly resistant to severe weather conditions



Wide range of colors exclusive choice of long lasting shiny whites








Perfect mold resistance

Stamoid

Heavy Cover

5-year warranty


UPF 50+

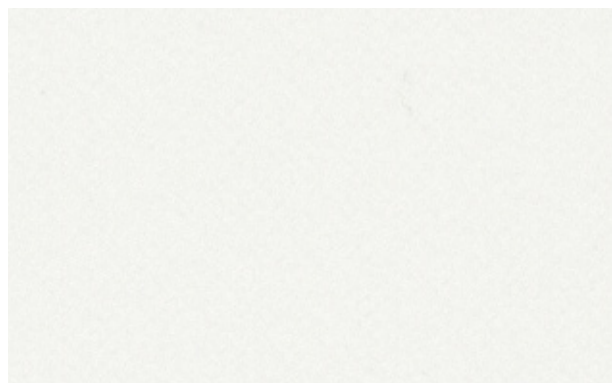


White

260 cm


F4313-03244




Sand
260 cm
F4313-01897



Pearl grey
260 cm
F4313-10001



Cloud grey
260 cm
F4313-20218




Navy
260 cm
F4313-10235

Stamoid

Easy

2-year warranty


UPF 50+

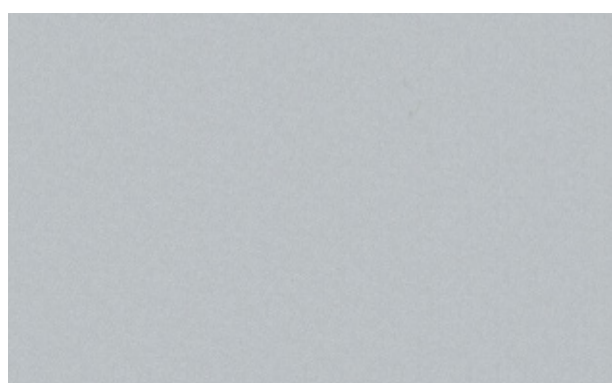


Pearl grey

260 cm

F4748-10001




White
260 cm
F4748-03244



Ivory
260 cm
F4748-10081



Royal blue
260 cm
F4748-04997



Navy
260 cm
F4748-10235



Quick and easy upkeep



Handling comfort thanks
to lightness of the fabrics








100% waterproof

Stamoid

Top

5-year warranty

UPF 50+

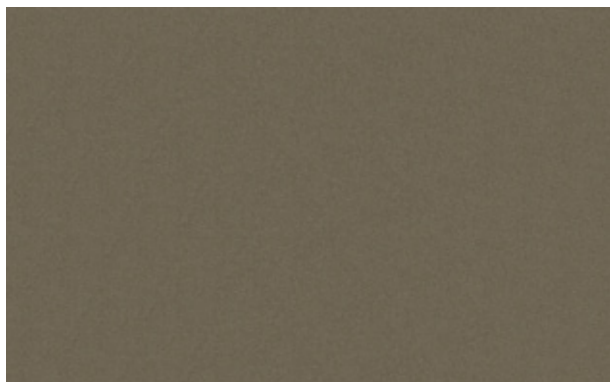


Desert

150 cm


F3933-20217




Snow White
150-260 cm
F3933-10309




White
150-260 cm
F3933-03244




Cream
150-260 cm
F3933-10204




Ivory
150 cm
F3933-10081




Beige
150-260 cm
F3933-01897




Taupe
150 cm
F3933-20165




Pearl grey
150-260 cm
F3933-10001




Cloud grey
150 cm
F3933-20218



Anthracite
150 cm
F3933-20166



Navy
150 cm
F3933-10235



Black
150-260 cm
F3933-00002



Royal Blue
150 cm
F3933-04997



Total protection against UVB rays and highly resistant to severe weather conditions



100% waterproof



Perfect mold resistance

Stamoid

Yachting protection

Stamoid Light	Stamoid Smart 1	Stamoid Easy	Stamoid Heavy Cover	Stamoid Top
---------------	-----------------	--------------	---------------------	-------------






■ Technical specifications

						Standards
Description	Multi-layer composite		Multi-layer composite	Multi-layer composite	Multi-layer composite	
Coating	1 side PVC	1 side silicone	1 side PVC	1 side PVC	2 sides PVC	
Base cloth	280 Dtex PES HT	Polyester 280/550 dTex	1100 Dtex	1100 Dtex PES HT	280 dTex PES HT	
Weight	300 g/m ²	280 g/m ²	430 g/m ²	520 g/m ²	430 g/m ²	EN ISO 2286-2
Width	150 - 260 - 300 cm	250 cm	260 cm	260 cm	150 - 260 cm	
Length of rolls	30 - 50 lm	30 lm	30 lm	30 lm	30 - 50 lm	
Thickness	0.30 mm					
Tensile strength (warp/weft)	100/100 daN/5 cm	125/140 daN/5 cm	230/230 daN/5 cm	320/350 daN/5 cm	120/120 daN/5 cm	EN ISO 1421
Tear strength (warp/weft)	7/7 daN	14/30 daN	32/28 daN	47/51 daN	6/7 daN	DIN 53.363
Flexing resistance (no damage)	100,000 cycles					EN ISO 32100 Bally test
Color light fastness	> 4/5 (1,000 hours)	> 4/5 (1,000 hours)	> 4/5 (1,000 hours)	> 4/5 (1,000 hours)	> 4/5 (1,000 hours)	QUVA test according ASTM G 154
UV filtration	UPF 50+	UPF 50+	UPF 50+	UPF 50+	UPF 50+	NF EN 13758-1+A1
Resistance to water infiltration	> 700 cm					EN 20811
Breathability	50 g/m ² /24h					
Mold resistance	Degree 0, excellent	Degree 0, excellent	Degree 0, excellent	Degree 0, excellent	Degree 0, excellent	EN ISO 846-A
Extreme working temperatures	-20 °C / +70 °C	-50 °C / +120 °C	-20 °C / +70 °C	-20 °C / +70 °C	-20 °C / +70 °C	

■ Management system

Quality	ISO 9001
Environment	ISO 14001
Energy	ISO 50001 only for F4128

■ Certifications, labels, warranty

Smart Coating Technology	Smart Coating Technology	Smart Coating Technology	Smart Coating Technology	Smart Coating Technology	
5-year warranty	7-year warranty	2-year warranty	5-year warranty	5-year warranty	
					

¹ "+ = 0" logo: summarises the Serge Ferrari Group's commitment to CSR, to align economic performance and positive impact. Find out about our concrete actions in our CSR report.

The technical data above are average values with a +/- 5% tolerance.

The buyer of our products is fully responsible for their application or their transformation concerning any possible third party. The buyer of our products is responsible for their implementation and installation in compliance with standards, codes of practice and safety regulations in force in destination countries. To ensure warranty effectiveness, refer to warranty certificate concerned available on demand. The values quoted above represent results of tests performed in compliance with common design practices and are provided for information only to enable customers to make the best use of our products. Our products are subject to changes prompted by technological developments. We reserve the right to modify their characteristics at any time. The buyer of our products is responsible for checking the validity of the above data.